

# GRAS 40HL

1/2" LEMO Low-noise  
Microphone System



Freq range: 10 Hz to 16 kHz  
Dyn range: 6.5 dB(A) to 110 dB  
Sensitivity: 850 mV/Pa

---

The GRAS 40HL 1/2" Low-noise Microphone System measures sound pressure levels down close to the threshold of human hearing. It is thus generally suitable for sound-power measurements on even very quiet products. Its very wide dynamic range permits measurements down to 6.5 dB re. 20 Pa (in 1/3-octave bands) from 20 Hz to 20 kHz.

### Typical applications and use

- Measurements at very low sound pressure levels
- Measurements on hard-disk drives, computer products, anechoic rooms, quiet rooms, etc
- Sound-power measurements at low levels

### Design

The 40HL comprises a special high-sensitive 1/2" free-field measurement microphone and an integrated 1/2" low-noise preamplifier. In combination, they connect to most high-quality input modules with LEMO 1B connector.

It complies with IEC 61672 class 1.

### Preamplifier

The preamplifier, a true 1/2" low-noise amplifier with LEMO 1B connector, has a built-in compensation filter for free-field microphones.

### Microphone

The 1/2" microphone is an externally-polarized free field microphone with a specially reduced inherent noise floor in order to achieve a high dynamic range and wide frequency range. Its diaphragm is specially tuned to yield high sensitivity coupled with low internal noise.

### TEDS


The preamplifier of the 40HL has TEDS according to IEEE 1451.4. If your measurement platform supports TEDS you can read and write data like properties and calibration data.

### Operating 40HL


For holding the microphone, you can order tripods and for level calibration of you need a pistonphone and Calibration Adapter attenuating the pistonphone signal to 94 dB re. 20 µPa. See the tab

Ordering info.

|  |   |                         |
|--|---|-------------------------|
| Frequency range ( $\pm 1$ dB)                        | Hz  | 12.5 to 10k             |
| Frequency range ( $\pm 2$ dB)                        | Hz  | 10 to 16 k              |
| Frequency range ( $\pm 3$ dB)                        | Hz  | 6 to 20k                |
| Dynamic range lower limit (microphone thermal noise) | dB(A)   | 6.5                     |
| Dynamic range upper limit                            | dB  | 110                     |
| Set sensitivity @ 250 Hz ( $\pm 2$ dB)               | mV/Pa   | 850                     |
| Polarization voltage                                 | V   | 200 V / Traditional     |
| Microphone venting                                   |   | Rear                    |
| Output impedance                                     | $\Omega$  | 47                      |
| Temperature range, operation                         | $^{\circ}\text{C} / ^{\circ}\text{F}$           | -20 to 60 / -4 to 140   |
| Temperature range, storage                           | $^{\circ}\text{C} / ^{\circ}\text{F}$           | -40 to 85 / -40 to 185  |
| Temperature coefficient @250 Hz                      | dB/ $^{\circ}\text{C}$ / dB/ $^{\circ}\text{F}$ | -0,007 / -0,004         |
| Static pressure coefficient @250 Hz                  | dB/kPa  | -0.01                   |
| Humidity range non condensing                        | % RH  | 0 to 95                 |
| Humidity coefficient @250 Hz                         | dB/% RH   | 0,001                   |
| Influence of axial vibration @1 m/s <sup>2</sup>     | dB re 20 $\mu\text{Pa}$                         | 63                      |
| TEDS UTID (IEEE 1451.4)                              |   | 27 v. 1.0               |
| Connector type                                       |   | 7-pin LEMO (FGG.1B.307) |
| CE/RoHS compliant/WEEE registered                    |   | Yes / Yes / Yes         |

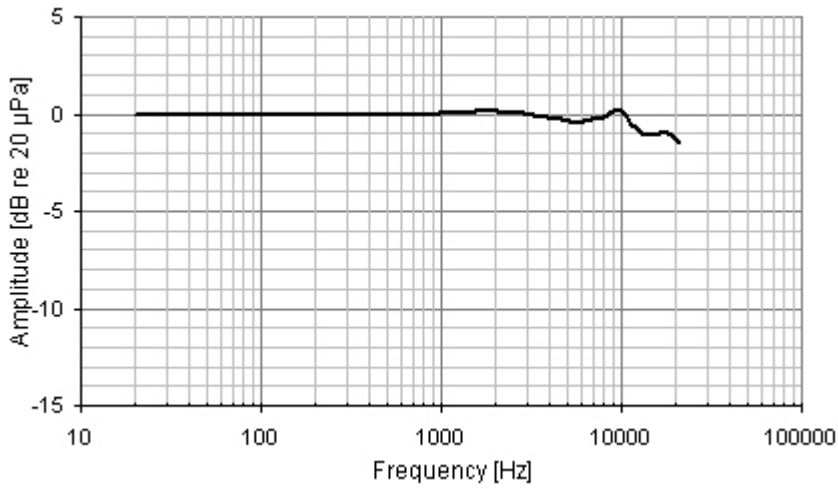

Typical frequency response

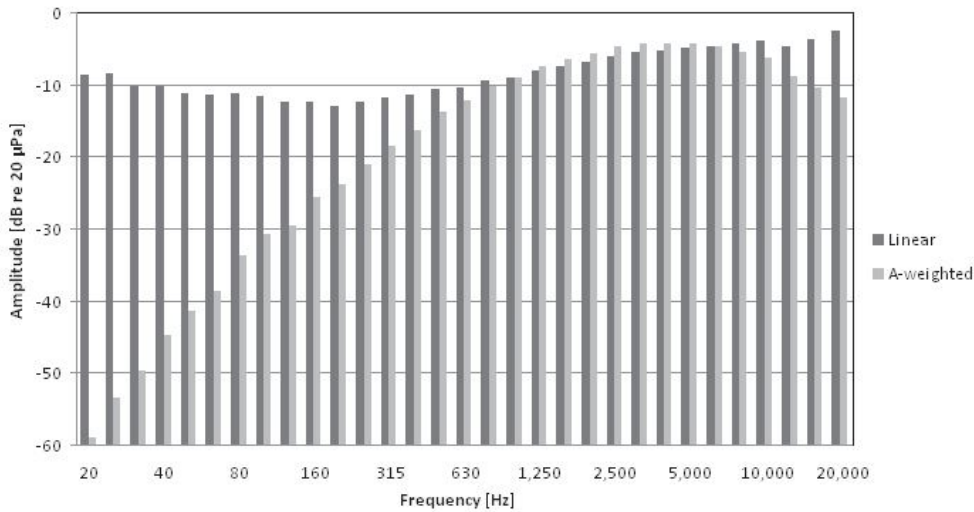

Typical noise floor shown in 1/3-octave bands - linear and A-weighted

GRAS Sound & Vibration reserves the right to change specifications and accessories without notice.

## Optional items

|                                |  |
|--------------------------------|--|
| <a href="#">GRAS AA0008</a>    | 3 m LEMO-to-LEMO cable*  |
| <a href="#">GRAS AA0009</a>    | 10 m LEMO-to-LEMO cable*   |
| <a href="#">GRAS AA0020-CL</a> | Customized length LEMO 7-pin - LEMO 7-pin Cable*                           |
| <a href="#">GRAS 12AD</a>      | 1-Channel Power Module   |
| <a href="#">GRAS 12AR</a>      | 2-Channel Power Module   |
| <a href="#">GRAS 12AA</a>      | 2-Channel LEMO Power Module with gain, filters and Syscheck generator      |
| <a href="#">GRAS 12AK</a>      | 1-Channel Power Module with gain, filters and SysCheck generator           |
| <a href="#">GRAS 12AQ</a>      | 2-Channel Universal Power Module with signal conditioning and PC interface |
| <a href="#">GRAS AL0006</a>    | Tripod   |
| <a href="#">GRAS RA0093</a>    | Adjustable, high quality, stainless steel tripod adapter                   |
| <a href="#">GRAS AM0069</a>    | Windscreen for 1/2" Microphones  |
| <a href="#">GRAS 42AP</a>      | Intelligent Pistonphone, Class 0   |
| <a href="#">GRAS 42AA</a>      | Pistonphone, Class 1   |
| <a href="#">GRAS RA0090</a>    | 94 dB Pistonphone Coupler  |

\*The cables also function as connection cables (to connect 40HL to a power module).

GRAS Sound & Vibration reserves the right to change specifications and accessories without notice.

# GRAS Worldwide

Subsidiaries and distributors in more  
than 40 countries

GRAS SOUND & VIBRATION A/S  
Skovlytoften 33  
2840 Holte  
Denmark  
Tel: +45 4566 4046  
gras@gras.dk

GRAS SOUND & VIBRATION USA  
2234 East Enterprise Parkway  
Twinsburg, OH 44087  
United States  
Tel: +1 330 425 1201  
sales@gras.us

GRAS SOUND & VIBRATION UK  
Building 115  
Bedford Technology Park Thurleigh,  
MK44 2YA Bedford  
United Kingdom  
Tel: +44 1234 639552  
sales@gras.co.uk

GRAS SOUND & VIBRATION CHINA LTD.  
Rm 1606, Kodak House II  
No. 39 Healthy Street East North Point  
Hong Kong  
China  
Tel: +852 2833 9987  
sales@gras.com.cn



## About GRAS Sound & Vibration

GRAS is a worldwide leader in the sound and vibration industry. We develop and manufacture state-of-the-art measurement microphones to industries where acoustic measuring accuracy and repeatability is of utmost importance in R&D, QA and production. This includes applications and solutions for customers within the fields of aerospace, automotive, audiology, and consumer electronics. GRAS microphones are designed to live up to the high quality, durability and accuracy that our customers have come to expect and trust.

**GRAS** Sound  
& Vibration